




REP 06 LR - REP 10 LR - REP 15/1 REP 15-20/2 - REP 15-20/4 TUCKAWAY TAIL-LIFTS

LOAD CAPACITY

- 600 KG
- 1000 KG
- 1500 KG
- 2000 KG

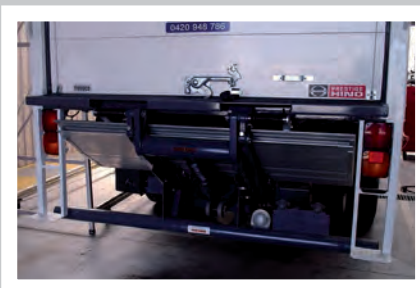

REP/2 . TUCKAWAY TAIL-LIFT - 2 CYLINDERS

REP/4 . TUCKAWAY TAIL-LIFT - 4 CYLINDERS

LOAD CAPACITY

- 1500 KG
- 2000 KG



TUCKAWAY
LIFTS



REP/4: 2 lifting + 2 tilting cylinders and automatic tilt


APPLICATIONS

The REP/2 and REP/4 folding tail-lifts are the ideal tail-lifts for distribution, vehicle rental companies, for vehicles where the maximum variable use is needed and/or vehicles for docking work.

REP/2 and REP/4 are recommended for bodies with flush doors, heavy duty vehicles and semitrailers.


TECHNICAL SPECIFICATIONS

Cylinders:	2 lift cylinders (REP/2) 2 lift cylinders + 2 tilt cylinders (REP/4)
Tilt cylinders:	Single acting (only on REP/4)
Automatic tilt at ground level:	Yes, mechanical
Platform type:	Standard folded
Platform material:	Aluminium / Aluminium
Standard platform depths Alu:	1233 - 1433 - 1583mm
Standard platform widths Alu:	2000 mm (Max 2300)
Lift arm lengths:	1221 mm
Lift arm widths (W):	H
Rear floor plate (body traverse):	on demand
Standard control unit:	Exterior control box with joystick, turn button
Weights incl. CE bumper	

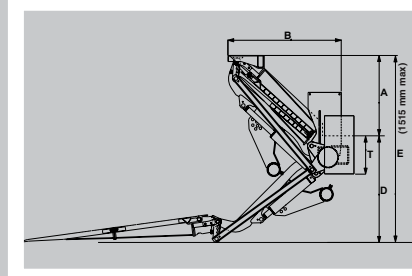

Mod.	Load capacity (centre to centre at 600 mm)	Standard platform dimensions Deep x Width	Weight *	A		E	B	T
				min.	max.	min.	max.	
REP 15/2 REP 15/4	1500 Kg	1133 x 2500 mm**	386 Kg	485 mm	735 mm	900 mm	1166 mm	250 mm
		1233 x 2500 mm**	393 Kg			950 mm		
		1433 x 2500 mm**	405 Kg			1050 mm		
		1583 x 2500 mm**	420 Kg			1100 mm		
REP 20/2 REP 20/4	2000 Kg	1133 x 2500 mm**	427 Kg	485 mm	735 mm	900 mm	1166 mm	250 mm
		1233 x 2500 mm**	433 Kg			950 mm		
		1433 x 2500 mm**	445 Kg			1050 mm		
		1583 x 2500 mm**	460 Kg			1100 mm		

* weight for Mod. REP./2; does not include rear cross member (55 Kg). Mod. REP./4 weight increase by 27 Kg. ** decreased width available on request. *** with 1283 mm platform. Centre of gravity of the vehicle depending on the type of platform and the size of the installations on the vehicle (see assembly instructions). The above mentioned weights are approximate and may vary according to production. Anteo reserves the right to change weights and technical specifications without prior notice. No indemnity for damages can be claimed from Anteo for changes in technical specifications and/or in weight.

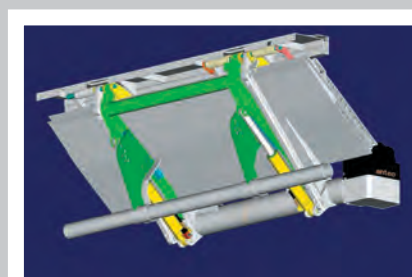



REP/2: 2 lifting cylinders and automatic tilt



REP/1 . TUCKAWAY TAIL-LIFT 1 CYLINDER

LOAD CAPACITY

- 1500 KG

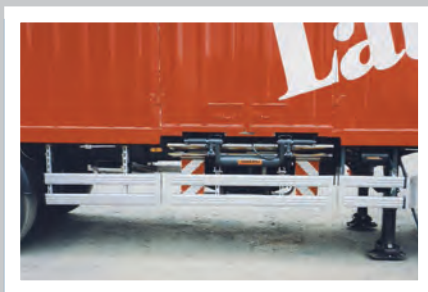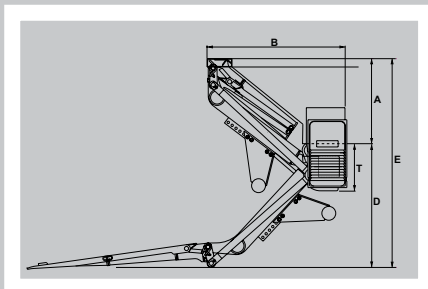

APPLICATIONS

The REP folding tail-lifts are the ideal tail-lifts for distribution, vehicle rental companies, for vehicles where the maximum variable use is needed and/or vehicles for docking work.

REP 15/1 is very light and compact.

REP 15/1 is recommended for vehicles weighing than 7 tons. or more.

TECHNICAL SPECIFICATIONS

Cylinders:	1 lift cylinder
Tilt cylinders:	No
Automatic tilt at ground level:	Yes, mechanical
Platform type:	Standard folded
Platform material:	Aluminium / Aluminium
Standard platform depths Alu:	1100 - 1200 - 1415 mm
Standard platform widths Alu:	2000 mm (Max 2300)
Lift arm lengths:	H
Lift arm widths (W):	620 mm 1120 mm (REP 15 RSG VERSION)
Rear floor plate (body traverse):	On demand
Standard control unit:	Exterior control box with joystick, turn button
Weights incl. CE bumper	

Mod.	Load capacity (centre to centre at 600 mm)	Standard platform dimensions Deep x Width	Weight *	A		E	B	T
				min.	max.	min.	max.	
REP 15/1	1500 Kg	1105 x 2000 mm**	310 Kg	330 mm	600 mm	910 mm	1144 mm	350 mm
		1200 x 2000 mm**	318 Kg			955 mm		
		1415 x 2000 mm**	326 Kg			1060 mm		

* weight does not include rear cross member (50 Kg). - ** width up to 2500 mm available on request. *** with 1133 mm platform.

Centre of gravity of the vehicle depending on the type of platform and the size of the installations on the vehicle (see assembly instructions). The above mentioned weights are approximate and may vary according to production. Anteo reserves the right to change weights and technical specifications without prior notice. No indemnity for damages can be claimed from Anteo for changes in technical specifications and/or in weight.

REP 06 LR - REP 10 LR . TUCKAWAY TAIL-LIFT


1 CYLINDER

LOAD CAPACITY

- 600 KG
- 1000 KG



TUCKAWAY
LIFTS

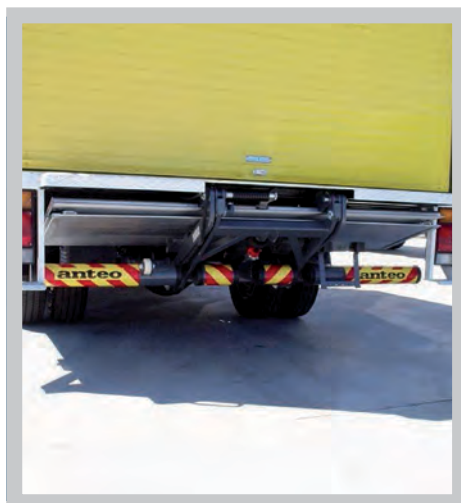

APPLICATIONS


The REP folding tail-lifts are the ideal tail-lifts for distribution, vehicle rental companies, for vehicles where the maximum variable use is needed and/or vehicles for docking work.

REP 06 LR is very light and compact. Therefore, it is suitable for smaller vehicles from 3.5 to 7 tons.

REP 10 LR for vehicles weighing 7 tons or more.

TECHNICAL SPECIFICATIONS

Cylinders:	1 lift cylinder
Tilt cylinders:	No
Automatic tilt at ground level:	No
Platform type:	Semi level-ride
Platform material:	Aluminium / Aluminium
Standard platform depths Alu:	950 - 1050 mm (REP 06 LR) 1050 - 1150 - 1250 mm (REP 10 LR)
Standard platform widths Alu:	1540 mm (Max 2000)
Lift arm lengths:	C - H (REP 06 LR) H (REP 10 LR)
Lift arm widths (W):	610 mm
Rear floor plate (body traverse):	On demand
Standard control unit:	Exterior control box with joystick, turn button
Weights incl. CE bumper	

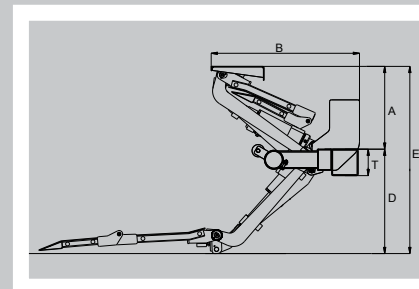

Mod.	Load capacity (centre to centre at 600 mm)	Standard platform dimensions Deep x Width	Weight *	A		E	B	T
				min.	max.	max.	max.	
REP 06 LR	600 Kg	950 x 1530 mm**	211 Kg	400 mm	460 mm	990 mm	982 mm	150 mm
		1150 x 1530 mm**	221 Kg					
REP 10 LR	1000 Kg	1050 x 2000 mm	240 Kg	430 mm	520 mm	1130 mm	1108 mm	150 mm
		1150 x 2000 mm	245 Kg					
		1250 x 2000 mm	250 Kg					

*weight does not include rear cross member (30 Kg - 66 lbs). **2000 mm (78" 3/4) width available (on request) - weight 239 Kg (526 lbs).

***2000 mm (78" 3/4) width max; decreased width available on request.

Centre of gravity of the vehicle depending on the type of platform and the size of the installations on the vehicle (see assembly instructions). The above mentioned weights are approximate and may vary according to production. Anteo reserves the right to change weights and technical specifications without prior notice. No indemnity for damages can be claimed from Anteo for changes in technical specifications and/or in weight.

